

# LINDY®

## CONNECTION PERFECTION

### VGA & Audio Selector 1:8

User Manual

English



LINDY No. 32584

[www.lindy.com](http://www.lindy.com)

Tested to Comply with FCC Standards  
For Home and Office Use!

© LINDY ELECTRONICS LIMITED & LINDY-ELEKTRONIK GMBH

FIRST EDITION (SEPTEMBER 2010)

## Overview

Thank you for purchasing the LINDY **VGA & Audio Selector 1:8**! With our highly reliable and quality product, you can enjoy the benefits of switching your VGA and Audio inputs, between eight devices using the supplied remote control.

## Features

- Switches Video and Audio from eight sources to one display monitor and speakers
- LED status to indicate the selected input
- supports VGA resolutions up to: 2048 x 1536
- supports Stereo Audio
- supports cable lengths of up to 70m (output) using LINDY Premium Gold S-VGA cables
- remote control for simple manual selection between inputs
- Plug & Play installation
- supports VGA, XGA, SVGA, UXGA, QXGA Multi-sync, CRT and TFT-LCD monitors
- includes Power Supply

## Package Contents

- VGA & Audio Selector 1:8
- Remote control
- Multi-Country PSU 100...240VAC/ 5V ≥1A
- this Manual

## Specifications

Signal Type		VGA , SVGA , XGA, SXGA , UXGA , QXGA and Multi-sync	
Connectors	Input	Video	HD-15 Female x 8
		Audio	3.5 x 1.35mm Audio Jack x 8
	Output	Video	HD-15 Female x 1
		Audio	3.5 x 1.35mm Audio Jack x 1
Video Resolution		2048 x 1536 @60 Hz	
VGA Bandwidth		450 MHz	
Cable Distance		210 feet / 70m	
Remote Control		Functional range 12m	
Power Supply		5VDC 1A ( Inner + , Outer - )	
Housing		Metal	
Dimension (L x W X H)		268 x 104 x 42 mm	

## Installation

1. Before starting the installation, please ensure that all the equipment to be used (PCs, Monitor, Speakers etc) are switched off.
2. Connect the first of your video sources to Video Input 1 using a VGA cable (HD-15 Male / HD-15 Male) and the first of your audio sources to Audio Input 1 using a Stereo Audio cable (3.5mm Male / 3.5mm Male).
3. Repeat step 2 to connect the rest of your audio and video sources to the inputs on the switch.
4. Connect the Monitor Output of the switch to your monitor using a VGA cable (HD-15 Male / HD-15 Male) and then connect the Audio Output to your speakers using a Stereo Audio cable (3.5mm Male / 3.5mm Male).
5. Connect the Remote Control cable to the Remote control Port.


- Turn on all the connected equipment.
- The installation is now complete. By default Input 1 will be used for Video and Audio when the equipment is first powered up.

### Front View




- Power button
- IR Sensor
- LED source indicator
- A/V Sync indicator
- Source select button

### Rear View

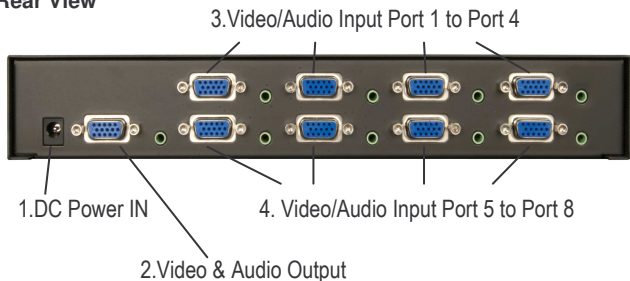

- Power: 5V DC power in
- Video/Audio output port
- Video/Audio output ports 1 - 4
- Video/Audio output ports 5 - 8

### IR Remote Control Unit

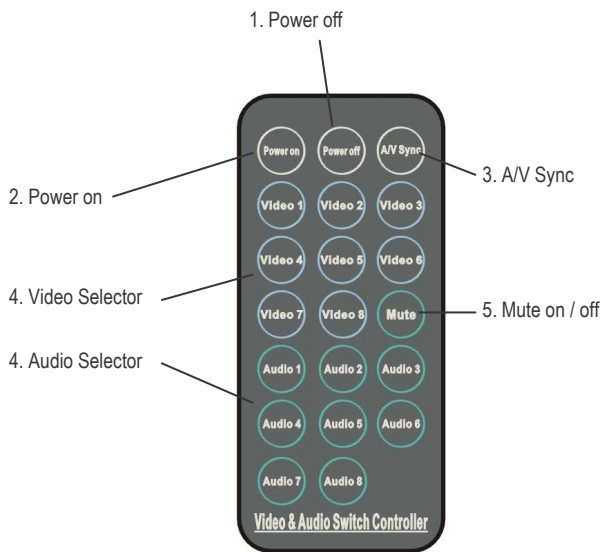

- Power on button
- Power off button
- Audio / Video Synchronize button.
- Audio/Video input select
- Mute button

## Technological Change Remark

The provided information is subject to technological development and change. Therefore product features and design may be adapted and vary slightly.

## CE/FCC & Warranty Statement

### FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation.

### CE Statement, EMC Compatibility

This device complies with EN Standards EN55022 and EN55024 according to the relevant EC EMC Directive. It must be used with shielded cables only to maintain EMC compatibility.

Dieses Produkt entspricht den einschlägigen EMV Richtlinien der EU und darf nur zusammen mit abgeschirmten Kabeln verwendet werden.

### LINDY Herstellergarantie

LINDY gewährt für dieses Produkt über die gesetzliche Regelung hinaus eine zweijährige Herstellergarantie ab Kaufdatum. Die detaillierten Bedingungen dieser Garantie finden Sie auf der LINDY Website aufgelistet bei den AGBs.

## Recycling Information



**WEEE (Waste of Electrical and Electronic Equipment), Recycling of Electronic Products**

### United Kingdom

In 2006 the European Union introduced regulations (WEEE) for the collection and recycling of all waste electrical and electronic equipment. It is no longer allowable to simply throw away electrical and electronic equipment. Instead, these products must enter the recycling process.

Each individual EU member state has implemented the WEEE regulations into national law in slightly different ways. Please follow your national law when you want to dispose of any electrical or electronic products.

More details can be obtained from your national WEEE recycling agency.

### Germany

Die Europäische Union hat mit der WEEE Richtlinie umfassende Regelungen für die Verschrottung und das Recycling von Elektro- und Elektronikprodukten geschaffen. Diese wurden im Elektro- und Elektronikgerätegesetz – ElektroG in deutsches Recht umgesetzt. Dieses Gesetz verbietet das Entsorgen von entsprechenden, auch alten, Elektro- und Elektronikgeräten über die Hausmülltonne! Diese Geräte müssen den lokalen Sammelsystemen bzw. örtlichen Sammelstellen zugeführt werden! Dort werden sie kostenlos entgegen genommen. Die Kosten für den weiteren Recyclingprozess übernimmt die Gesamtheit der Gerätehersteller.

### France

En 2006, l'union Européenne a introduit la nouvelle réglementation (DEEE) pour le recyclage de tout équipement électrique et électronique.

Chaque Etat membre de l'Union Européenne a mis en application la nouvelle réglementation DEEE de manières légèrement différentes. Veuillez suivre le décret d'application correspondant à l'élimination des déchets électriques ou électroniques de votre pays.

### Italy

Nel 2006 l'unione europea ha introdotto regolamentazioni (WEEE) per la raccolta e il riciclo di apparecchi elettrici ed elettronici. Non è più consentito semplicemente gettare queste apparecchiature, devono essere riciclate.

Ogni stato membro dell' EU ha tramutato le direttive WEEE in leggi statali in varie misure. Fare riferimento alle leggi del proprio Stato quando si dispone di un apparecchio elettrico o elettronico.

Per ulteriori dettagli fare riferimento alla direttiva WEEE sul riciclaggio del proprio Stato.

LINDY No. 32584

www.lindy.com



1<sup>st</sup> Edition September 2010